


IPSTARTEC11



For Lifting, Transferring and Controlled Tilting of Steel Beams

- Available in capacities of 1.5 and 2.5 metric tons (higher Working Load Limits are available upon request).
- Jaw openings available: .25" to .75".
- Welded alloy steel body for strength and smaller size. Forged alloy, components where required.
- Equipped with handle for easy placement.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Company name (Crosby IP), logo, Working Load Limit and jaw opening permanently stamped on body.
- Each product is individually serialized, with the serial number and Proof Load test date stamped on body. User manual with test certificate is included with each clamp.
- Maintenance replacement parts are available.
- Manufactured by an ISO 9001 facility.
- All sizes are RFID equipped.

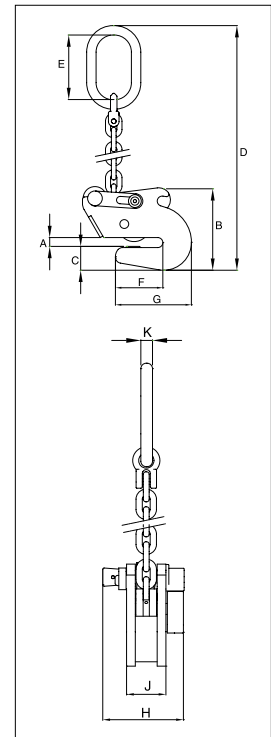

Model IPSTARTEC11

Load Rated

| Model | Working Load Limit (t)* | Stock No. | Weight Each (lb) | Dimensions (in) | | | | | | | | | |
|-------------|-------------------------|-----------|------------------|-----------------|------|------|-------|------|------|------|------|------|------|
| | | | | Jaw A | B | C | D | E | F | G | H | J | K |
| IPSTARTEC11 | 1.5 | 2701812 | 14.6 | 0.25 - 0.50 | 5.51 | 1.54 | 22.64 | 4.33 | 3.19 | 5.08 | 4.96 | 2.13 | 0.63 |
| IPSTARTEC11 | 2.5 | 2701822 | 32.0 | 0.25 - 0.75 | 8.27 | 2.17 | 28.54 | 5.31 | 4.53 | 7.17 | 5.51 | 2.91 | 0.71 |

* Design Factor based on EN 13155 and ASME B30.20.

